

### Open Frame Touch Monitor

#### HO 106 HTB

25,65 cm / 10.1" Diagonal  
LED Backlight – Format 16:9

- 1366 x 768 Resolution
- 10-Point Touch P-Cap Technology
- 170° / 170° Wide Viewing Angle
- Dual Input: HDMI + VGA
- IP65 (front) Rating Level
- 12 Volt External Power Supply
- ≥6H Toughened Hard Panel Surface
- TP Module Thickness 2mm
- Sturdy Metal Case
- VESA Mount and Multiple Mounting Options
- Edge to Edge glass without raised frame
- Orientation: Landscape, Portrait, Face-Up



25,65 cm / 10.1"

Part No.: HO 106 HTB

#### SIZE, RESOLUTION



10.1"  
16:9 Aspect Ratio



1366 x 768

#### CONNECTIVITY, IP LEVEL



HDMI  
VGA



IP 65  
Water & Dust  
Protection

#### VIEWING ANGLE, BRIGHTNESS



170° Wide  
Viewing Angle



350cd/m<sup>2</sup> Panel  
Brightness

#### OTHER FEATURES





10 Points  
Touch



Touch to  
USB Link

Display Size	25,65 cm / 10.1" Diagonal
Panel Type	TFT – LED Backlight, FFS (IPS) Panel (*)
Aspect Ratio	16:9
Resolution (H x V)	1366 x 768
Brightness	350 cd/m <sup>2</sup> (Panel) / 300 cd/m <sup>2</sup> (Monitor)
Contrast (Typ.)	800:1 (Typical)
Display Area	223,2 x 125,2 mm
Viewing Angle L/R; U/D	170° H / 170° V (CR > 10)
Response Time	30 msec (Typ.)
Pixel Pitch	0,1635 (H) x 0,1635 (V) mm
Touch Type	Projected Capacitive Type – 10-Point Touch Material Glass + Glass (G+G)
Display Colors	16,7M Colors
Horizontal Frequency	30 ~ 83 kHz
Vertical Frequency	56 ~ 75 Hz
Max Display Frequency	1366 x 768 @ 60 Hz
Input 1	VGA (D-Sub)
Input 2	HDMI 1.4
Input 3	USB Type B (for Touch function)
Speakers	-
Power Consumption	On: 5W; Stand-by: 0,5W; Off: 0,3W
AC Power Range	External Power Supply: 12 Volt / 3A Input: AC 100 ~ 240 Volt; 50 ~ 60 Hz
Product Dimensions	263,5 x 37,5 x 165 mm (W x D x H)
Packing Dimensions	370 x 90 x 237 mm (W x D x H) TBC
Net / Gross Weight	1,4 Kg / 2,2 Kg TBC

VESA Mounting	75 x 75 mm. Screws: M4, 4mm (Max), pitch 0,7 mm
Glass Protection	Thickness 2 mm
Hardness / Transmittance	≥6H Toughened hard panel surface / ≥85%
IP Rating Level	IP 65 (Front), Water and Dust Protection **
Controls	Menu (Enter) / < (Bri) / > (Vol) / Auto (Exit) / Power
On Screen Display	7 OSD Languages
Color	Warm, Normal, Cool, User Mode
Preset Mode	PC, ECO, Movie, Game
Orientation	Landscape, Portrait, Face-Up
Accessory	Power Adaptor (12V, 3A); Power Cord (1,5m); USB 2.0 (B-A) Cable (1,5m); HDMI Cable (1,5m)

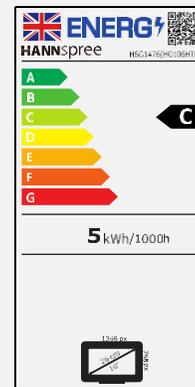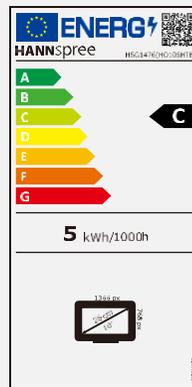

Supplier's Name	HANNspree
Model Name	HO106HTB
Energy efficiency class for standard Dynamic Range (SDR)	C
Annual Energy Power Consumption (kWh/1000h)	5 kWh/1000h
On mode power demand for Standard Dynamic Range (SDR)	5 W
Off mode power demand (W)	0,3 W
Standby mode power demand (W)	0,5 W
Screen Diagonal (cm / inches)	25,65cm/10.1"
Resolution	1366 x 768

PART NO.:  
HO106HTB



## HO 106 HTB 10.1" Open Frame Touch Monitor

