

Open Frame Touch Monitor

HO 430 HTB

43" / 109,22cm Diagonal
LED Backlight – Format 16:9


- 1920 x 1080 Full HD 1080P Resolution
- 10-Point Touch P-Cap Technology
- 178° / 178° Ultra Wide Viewing Angle
- 1200:1 High Contrast Ratio
- **Display Protection: Thickness 4mm**
- **IP54 (front) Rating Level**
- **16/7 Operating**
- ≥6H Toughened Hard Panel Surface
- Slim Profile with Narrow Edges
- Touch-Through Glass (available upon request*)
- VESA Mount and Multiple Mounting Options
- Orientation: Landscape, Portrait, Face-Up



43" / 109,22 cm

Part. No.: HO 430 HTB

SIZE, RESOLUTION




43"
16:9 Aspect Ratio



Full HD
1920 x 1080

CONNECTIVITY, IP LEVEL




HDMI
VGA



IP 54
Water & Dust
Protection

VIEWING ANGLE, VESA



178 Ultra-Wide
Viewing Angle



10 Point Touch

OTHER FEATURES



Low Power
Consumption



30.000 Hours
Lifetime

HO 430 HTB 43" Open Frame Touch Monitor

| | |
|------------------------|--|
| Display Size | 109,22 cm / 43" Diagonal |
| Panel Type | TFT – LED Backlight |
| Aspect Ratio | 16:9 |
| Resolution (H x V) | 1920 x 1080 Full HD |
| Brightness | 350cd/m ² (Panel), 300cd/m ² (Monitor) |
| Contrast (Typ.) | 1.200:1 (Typical) |
| Display Area | 943 (H) x 531(V) |
| Viewing Angle L/R; U/D | 178° H / 178° V (CR > 10) |
| Response Time | 8 msec |
| Pixel Pitch | 0,490 (H) x 0,490 (V) mm |
| Touch Type | Projected Capacitive Type – 10 Point Touch Material Glass + Glass |
| Display Colors | 16.7M Colors |
| Horizontal Frequency | 30 ~ 83 kHz |
| Vertical Frequency | 60 Hz |
| Max Display Frequency | 1920 x 1080 @ 60Hz |
| Input 1 | VGA |
| Input 2 | HDMI |
| Input 3 | USB Type B (Touch) |
| Input 4 | - |
| Power Consumption | On: 61W; Stand-by: ≤2,65W; Off: ≤2,6W (TBC) |
| AC Power Range | AC 100 ~ 240 Volt; 50 ~ 60 Hz |
| Product Dimensions | 1013.3 x 69 x 601.5 mm (W x D x H) |
| Packing Dimensions | 1110 x 170 x 700 mm (W x D x H) |
| Net / Gross Weight | 28 Kg / 30 Kg |


| | |
|--------------------------|--|
| VESA Mounting | 400 x 400 mm |
| Display Protection | TP Thickness 4±0.3 mm |
| Hardness / Transmittance | ≥6H Toughened hard panel surface / ≥85% |
| IP Rating Level | IP 54 (Front), Water and Dust Protection * |
| Controls | Power, Auto, (+), (-), Menu |
| LED Backlight life | 30.000 hours |
| Accessory | Power supply; HDMI Cable (1.5m); USB Cable for Touch. |
| Certifications | CE, RoHS |
| On Screen Display | 9 Languages |
| Kensington Lock | NA |
| OS Support | Windows 7/8/10 (Multi-touch) Windows XP (Single-touch) Linux (Drivers Needed) Android 5.1 onwards |
| MTBF | 50.000 hours |
| Orientation | Landscape, Portrait, Face-Up |

PART. NO.:
HO 430 HTB

HANNSpree

HO 430 HTB
43" Open Frame Touch Monitor

Experts in **Display**

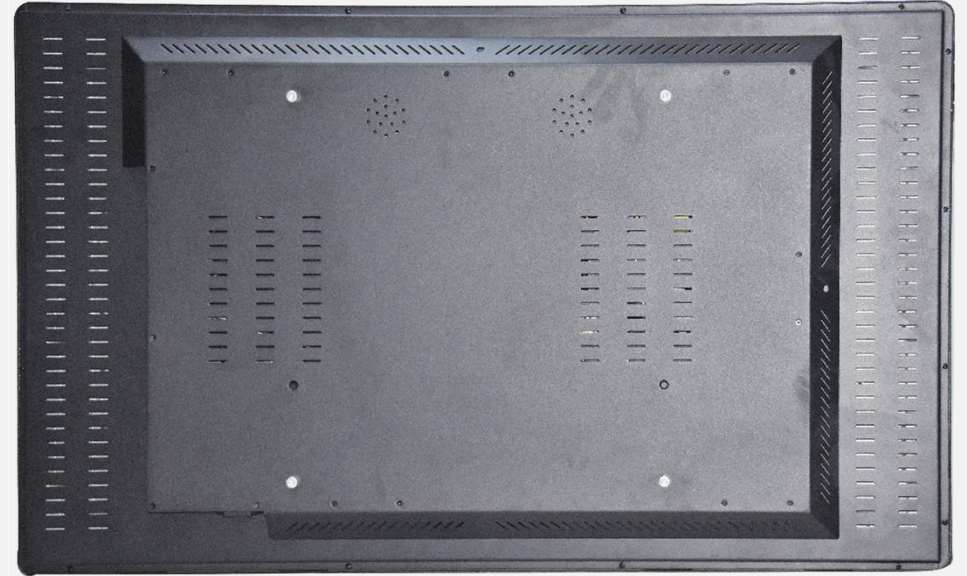

HANNSpree

HO 430 HTB
43" Open Frame Touch Monitor

Experts in **Display**

